



Overhead console switch assembly - Roof opening panel control switch

Schematic

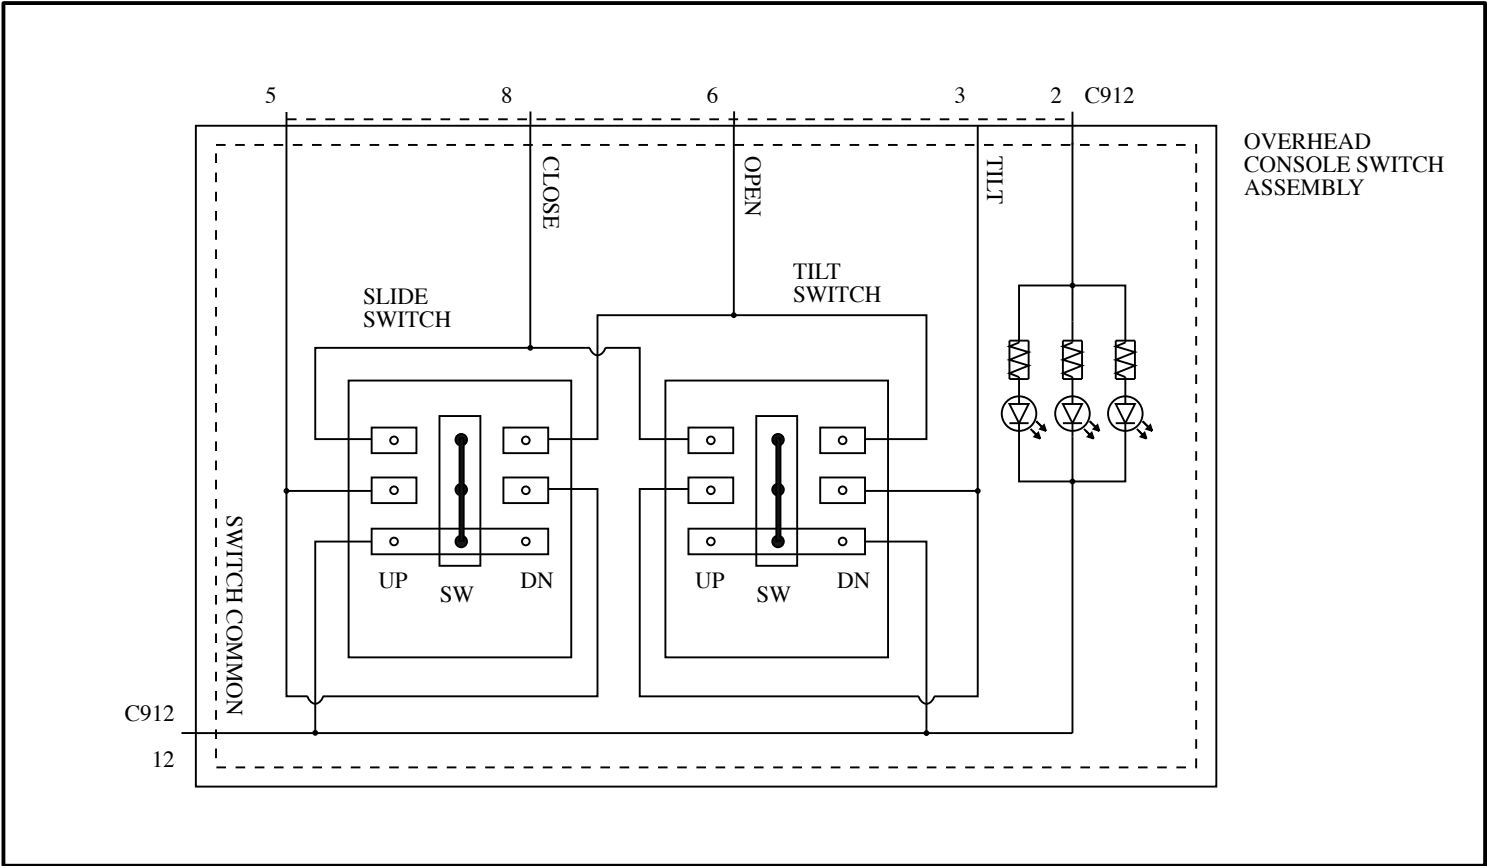

Terminals

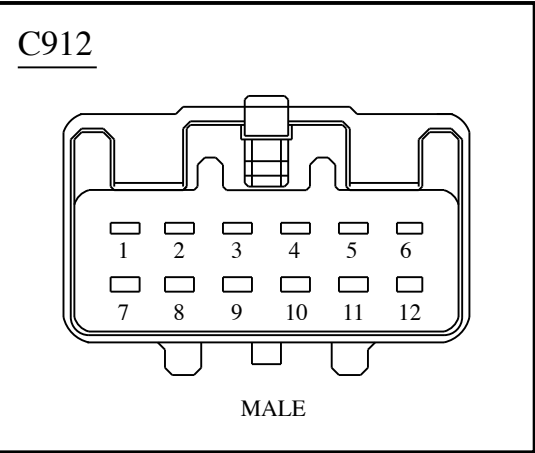

Component testing procedure - Roof opening panel control switch

Circuit to test	Connect self-powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Tilt circuit	12 and 3	Pull Tilt (UP)	Closed circuit
	12 and 8		
	12 and 3	Press Tilt (DOWN)	Closed circuit
	12 and 6		
Slide circuit	12 and 8	Pull Slide (UP)	Closed circuit
	12 and 6	Press Slide (DOWN)	Closed circuit

